



High Power Corridor Down Light

## **Features**

- ▶ High Powered LED Technology
- ▶ Fixes to Battery Spacer (shown and supplied) and standard Hochiki base YBN-R/3 (shown but sold separately)
- ▶ Requires NF89 battery (sold separately)





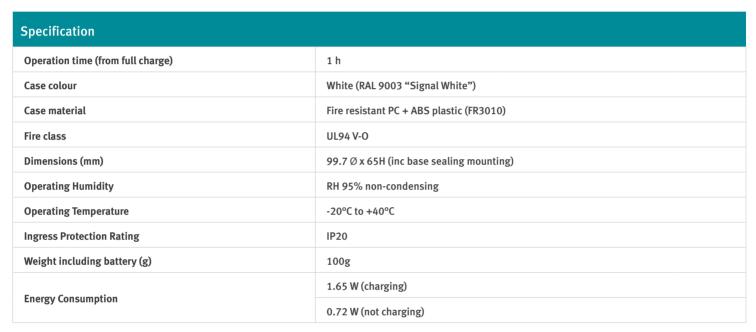

## **Ordering Codes**

**Product** 

**High Power Corridor Down Light** 

**Part Number** NFW89/C

## **Photometric Data**

NON-MAINTAINED	2m Wide Corridor	
Mounting Height (m)	Spacing 1 Lux Axial to Wall	Spacing 1 Lux Axial Between
		00
2.00	4.60	9.00
2.20	5.00	9.60
2.50	5.50	10.60
2.70	5.90	11.60
3.00	6.60	12.60
3.50	7.20	14.20
4.0	8.00	15.60
4.50	8.90	17.00
5.00	9.60	19.00
6.00	10.50	20.00
7.00	12.00	22.00



Hochiki Europe (UK) Ltd. reserves the right to alter the specification of its products from time to time without notice. Although every effort has been made to ensure the accuracy of the information contained in this document it is not warranted or represented by Hochiki Europe (UK) Ltd. to be a complete and up-to-date description.









